

SylCircle DualTone

SYLCIRCLE IP44 1025LM 830/840 DUALTONE

0043497



Product features

- Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyer. Even and uniform light distribution with a halo lighting effect on the wall surface. Body Size diameter 250mm. Besa mounting box compatible, hole distance 51mm. DualTone functionality enables switch between 3000K and 4000K colour temperatures. Power 12W, output 1025 lumens (4000k). Non-dimmable. IK03, IP44. Low maintenance with 30,000 hours LED life expectancy. Energy Class: A++, A+, A



PRODUCT OVERVIEW

Product name	SYLCIRCLE IP44 1025LM 830/840 DUALTONE
Technology	LED
Housing	Steel
General application	Hospitality
ETIM Class	EC002892
Warranty	3 years
Fixture luminous flux (lm)	1025
Luminaire efficacy (lm/W)	85
Colour temperature (K)	4000
Light colour	Amber White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class I
Dimmable	No
Minimum dimming level (%)	100
LED Flickering Rate	High (>40%)
Housing colour	White
IP rating	IP44
IK rating	IK03
Product EAN number	5410288434971
Light source included	SAX0000A_0000

DATA TABLE

General data

Product name	SYLCIRCLE IP44 1025LM 830/840 DUALTONE
Technology	LED
Housing	Steel
General application	Hospitality
Operating temperature range (°C)	-20°C - 40°C

SylCircle DualTone

SYLCIRCLE IP44 1025LM 830/840 DUALTONE

0043497

Performance ambient temperature Tq (°C) 25

ETIM Class EC002892

Warranty 3 years

Optical data

Fixture luminous flux (lm) 1025

Luminaire efficacy (lm/W) 85

Colour temperature (K) 4000

Correlated colour temperature range (K) 3000 - 4000

Light colour Amber White or Neutral White

CRI (Ra) 80

Colour Variation Initial (SDCM) SDCM6

Beam Angle (°) 120

Distribution type Diffuse

Photobiological Risk Group RG0

Electrical data

Total power consumption (W) 12

Mains voltage (V) 220-240V~

Lamp power factor 0.8

Electrical protection Class I

Dimmable No

Minimum dimming level (%) 100

Drive current (mA) 38

Inrush Current (A) 0.5

Inrush Duration (µs) 30

Glow Wire Test (°C) 650

Nominal Frequency (Hz) 50/60Hz

LED Flickering Rate High (>40%)

Max. Luminaires per 10A C Breaker 60

Max. Luminaires per 13A C Breaker 78

Max. Luminaires per 16A C Breaker 96

Max. Luminaires per 20A C Breaker 120

Max. Luminaires per 10A B Breaker 36

Max. Luminaires per 13A B Breaker 47

Max. Luminaires per 16A B Breaker 58

Max. Luminaires per 20A B Breaker 72

Lifetime data

Lifespan L70 B50 30000

Physical data

Housing colour White

IP rating IP44

IK rating IK03

Diffuser finish Opal

Diffuser material Polypropylene

Nominal Product Length (mm) 250

SylCircle DualTone

SYLCIRCLE IP44 1025LM 830/840 DUAL TONE

0043497

Nominal Product Width (mm)	250
Nominal Product Height (mm)	80
Nominal Product Diameter (mm)	250
Weight (kg)	0.25





Packaging

Single packaging type	Carton
Product EAN number	5410288434971
Packaging single length / height (cm)	25.2
Packaging single width (cm)	8.3
Packaging single depth (cm)	25.2
DUN14 (outer)	15410288434978
Units per outer package	6
Packaging outer length / height (cm)	54.6
Packaging outer width (cm)	28.5
Packaging outer depth (cm)	29.0

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

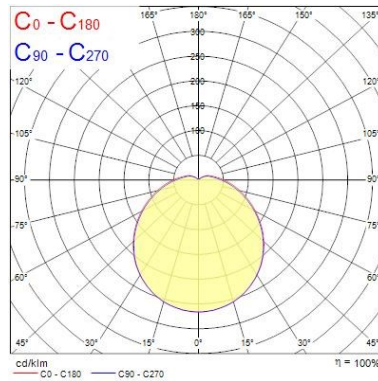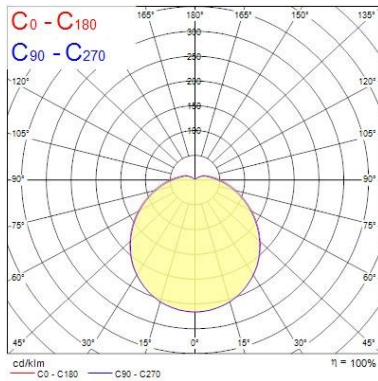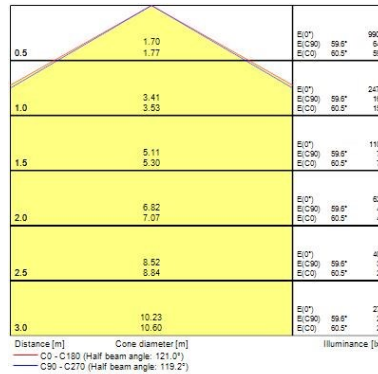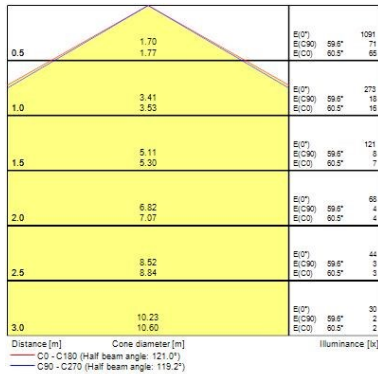

SylCircle DualTone

SYLCIRCLE IP44 1025LM 830/840 DUALTONE

0043497

TECHNICAL DRAWINGS

