

SylFlood PIR
SylFlood IP54 PIR 950LM 830 Black
0047114



Product features

- The streamlined, durable, lightweight die-cast aluminium body makes SylFlood a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 950 lm, 10 W, 95 lm/W, 3000K, non dimmable, CRI>80, IP54, IK06 - fixture, IK05 - sensor, Class I, lifespan L70:B50: 90000 hrs, 190 x 123 x 52 mm (L x W x H). Weight: 0.475kg. PIR sensor included.




PRODUCT OVERVIEW

Product name	SylFlood IP54 PIR 950LM 830 Black
Technology	LED
General application	Retail
ETIM Class	EC001744
Warranty	3 years
Fixture luminous flux (lm)	950
Luminaire efficacy (lm/W)	95
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	10.0
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	Black
IP rating	IP54
IK rating	IK06
Product EAN number	5410288471143
Dimming method	N/A

PHOTOMETRY

SylFlood PIR
SylFlood IP54 PIR 950LM 830 Black
0047114

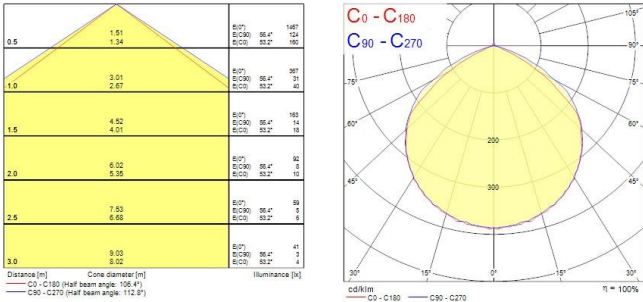

TECHNICAL DRAWINGS

