

YourHome Spot IP44

YOURHOME SPOT 420LM 830 IP44 DIM WHITE

0005276



Product features

- Integrated LED recessed spotlight, vertical tilt 30°, RAL9016 colour, 420lm, 5.5W, phase dimmable trailing/leading edge, 3000K, 38° degree beam angle, polycarbonate white body, low profile 47mm recessed depth, IP44 from the front, IK03, loop-in/loop-out terminals for fast wiring, 86mm bezel diameter, 68-74mm cutout, clear lens. Additional silver bezel included in the packaging. Lifetime: 30.000 hours at L70. Energy Class: A++, A+, A.



PRODUCT OVERVIEW

Product name	YOURHOME SPOT 420LM 830 IP44 DIM WHITE
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Residential & Consumer
ETIM Class	EC001744
Warranty	3 years
Fixture luminous flux (lm)	420
Luminaire efficacy (lm/W)	76
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	38
Photobiological Risk Group	RG0
Total power consumption (W)	5.5
Electrical protection	Class II
Dimmable	Yes
Minimum dimming level (%)	10
LED Flickering Rate	Medium (21% - 40%)
Housing colour	White
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288052762
Light source included	SAX0000A_0000

DATA TABLE

General data

Product name	YOURHOME SPOT 420LM 830 IP44 DIM WHITE
Technology	LED

YourHome Spot IP44

YOURHOME SPOT 420LM 830 IP44 DIM WHITE

0005276

Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Residential & Consumer
Operating temperature range (°C)	-10°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	3 years

Optical data

Fixture luminous flux (lm)	420
Luminaire efficacy (lm/W)	76
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	38
Distribution type	Direct
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

Electrical data

Total power consumption (W)	5.5
Mains voltage (V)	220-240V~
Lamp power factor	0.85
Electrical protection	Class II
Dimmable	Yes
Minimum dimming level (%)	10
Drive current (mA)	100
Inrush Current (A)	10
Inrush Duration (µs)	200
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)
Max. Luminaires per 10A C Breaker	60
Max. Luminaires per 13A C Breaker	80
Max. Luminaires per 16A C Breaker	100
Max. Luminaires per 20A C Breaker	120

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	White
IP rating	IP44/20
IK rating	IK03
Diffuser finish	Prismatic

YourHome Spot IP44

YOURHOME SPOT 420LM 830 IP44 DIM WHITE

0005276

Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	87
Nominal Product Width (mm)	87
Nominal Product Height (mm)	47
Nominal Product Diameter (mm)	87
Weight (kg)	0.087



Packaging

Single packaging type	Carton
Product EAN number	5410288052762
Packaging single length / height (cm)	9.0
Packaging single width (cm)	9.0
Packaging single depth (cm)	5.5
DUN14 (inner)	25410288052766
Units per inner package	6
Packaging inner length / height (cm)	28.5
Packaging inner width (cm)	9.0
Packaging inner depth (cm)	19.0
DUN14 (outer)	15410288052769
Units per outer package	48
Packaging outer length / height (cm)	38.0
Packaging outer width (cm)	24.0
Packaging outer depth (cm)	29.5

Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

PHOTOMETRY

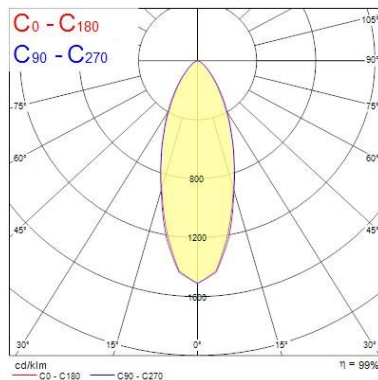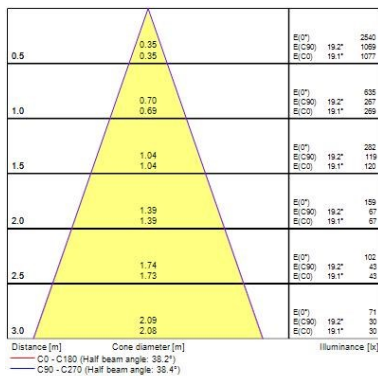

TECHNICAL DRAWINGS

YourHome Spot IP44

YOURHOME SPOT 420LM 830 IP44 DIM WHITE

0005276

